



SCALE 900 SERIES

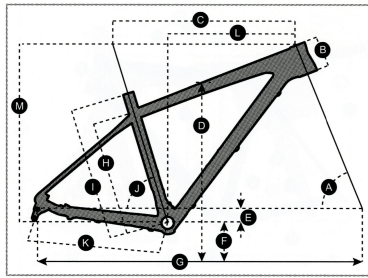

SCALE: 710, 720, 730

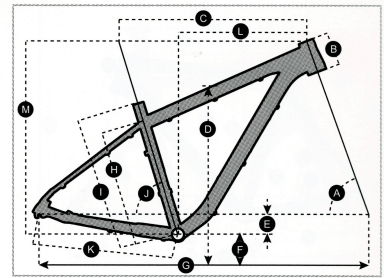

BIG JON

SCALE 900 RC: SL, WORLD CUP, PRO
SCALE: 900 Elite, 920, 930

	S		M		L	
A HEAD TUBE ANGLE	69.5°		69.5°		69.5°	
B HEAD TUBE LENGTH	95.0 mm	3.7 in	100.0 mm	3.9 in	115.0 mm	4.5 in
C TOP TUBE HORIZONTAL	575.0 mm	22.6 in	600.0 mm	23.6 in	625.0 mm	24.6 in
D STANDOVER HEIGHT	743.0 mm	29.3 in	774.0 mm	30.5 in	800.0 mm	31.5 in
E BB OFFSET	-58.0 mm	-2.3 in	-58.0 mm	-2.3 in	-58.0 mm	-2.3 in
F BB HEIGHT	312.0 mm	12.3 in	312.0 mm	12.3 in	312.0 mm	12.3 in
G WHEEL BASE	1,076.4 mm	42.4 in	1,101.8 mm	43.4 in	1,127.9 mm	44.4 in
H BB CENTER TO TOPTUBE CENTER	325.0 mm	12.8 in	375.0 mm	14.8 in	415.0 mm	16.3 in
I BB CENTER TO TOP OF SEATTUBE	390.0 mm	15.4 in	440.0 mm	17.3 in	480.0 mm	18.9 in
J SEAT ANGLE	73.6°		73.6°		73.6°	
K CHAINSTAY	425.0 mm	16.7 in	425.0 mm	16.7 in	425.0 mm	16.7 in
L REACH	398.7 mm	15.7 in	422.3 mm	16.6 in	443.2 mm	17.4 in
M STACK	599.0 mm	23.6 in	603.6 mm	23.8 in	617.7 mm	24.3 in
N STEM LENGTH	60.0 mm	2.4 in	70.0 mm	2.8 in	80.0 mm	3.1 in
O TRAIL	83.9 mm	3.3 in	83.9 mm	3.3 in	83.9 mm	3.3 in

SCALE: 950, 970, 990

	S		M		L	
A HEAD TUBE ANGLE	69.5°		69.5°		69.5°	
B HEAD TUBE LENGTH	105.0 mm	4.1 in	105.0 mm	4.1 in	115.0 mm	4.5 in
C TOP TUBE HORIZONTAL	575.0 mm	22.6 in	600.0 mm	23.6 in	625.0 mm	24.6 in
D STANDOVER HEIGHT	750.5 mm	29.5 in	779.4 mm	30.7 in	791.0 mm	31.1 in
E BB OFFSET	-58.0 mm	-2.3 in	-58.0 mm	-2.3 in	-58.0 mm	-2.3 in
F BB HEIGHT	315.5 mm	12.4 in	315.5 mm	12.4 in	315.5 mm	12.4 in
G WHEEL BASE	1,090.8 mm	42.9 in	1,115.8 mm	43.9 in	1,141.5 mm	44.9 in
H BB CENTER TO TOPTUBE CENTER	325.0 mm	12.8 in	375.0 mm	14.8 in	415.0 mm	16.3 in
I BB CENTER TO TOP OF SEATTUBE	395.0 mm	15.6 in	440.0 mm	17.3 in	480.0 mm	18.9 in
J SEAT ANGLE	73.6°		73.6°		73.6°	
K CHAINSTAY	438.0 mm	17.2 in	438.0 mm	17.2 in	438.0 mm	17.2 in
L REACH	394.2 mm	15.5 in	419.2 mm	16.5 in	441.4 mm	17.4 in
M STACK	591.0 mm	23.3 in	591.0 mm	23.3 in	600.4 mm	23.6 in
N STEM LENGTH	60.0 mm	2.4 in	70.0 mm	2.8 in	80.0 mm	3.1 in
O TRAIL	85.2 mm	3.4 in	85.2 mm	3.4 in	85.2 mm	3.4 in

SCALE: 710 PLUS, 720 PLUS, 730 PLUS

	S		M		L	
A HEAD TUBE ANGLE	66.5°		66.5°		66.5°	
B HEAD TUBE LENGTH	100.0 mm	3.9 in	105.0 mm	4.1 in	115.0 mm	4.5 in
C TOP TUBE HORIZONTAL	577.0 mm	22.7 in	602.0 mm	23.7 in	627.0 mm	24.7 in
D STANDOVER HEIGHT	780.0 mm	30.7 in	806.0 mm	31.7 in	829.0 mm	32.6 in
E BB OFFSET	-55.0 mm	-2.2 in	-55.0 mm	-2.2 in	-55.0 mm	-2.2 in
F BB HEIGHT	310.0 mm	12.2 in	310.0 mm	12.2 in	310.0 mm	12.2 in
G WHEEL BASE	1,108.0 mm	43.6 in	1,133.4 mm	44.6 in	1,159.3 mm	45.6 in
H BB CENTER TO TOPTUBE CENTER	328.0 mm	12.9 in	383.0 mm	15.1 in	425.0 mm	16.7 in
I BB CENTER TO TOP OF SEATTUBE	390.0 mm	15.4 in	440.0 mm	17.3 in	480.0 mm	18.9 in
J SEAT ANGLE	72.8°		72.8°		72.8°	
K CHAINSTAY	439.0 mm	17.3 in	439.0 mm	17.3 in	439.0 mm	17.3 in
L REACH	389.0 mm	15.3 in	412.0 mm	16.2 in	435.0 mm	17.1 in
M STACK	607.0 mm	23.9 in	612.0 mm	24.1 in	621.0 mm	24.4 in
N STEM LENGTH	50.0 mm	2.0 in	60.0 mm	2.4 in	70.0 mm	2.8 in

BIG JON

	S		M		L	
A HEAD TUBE ANGLE	69.0°		69.0°		69.0°	
B HEAD TUBE LENGTH	105.0 mm	4.1 in	105.0 mm	4.1 in	115.0 mm	4.5 in
C TOP TUBE HORIZONTAL	575.0 mm	22.6 in	600.0 mm	23.6 in	625.0 mm	24.6 in
D STANDOVER HEIGHT	787.0 mm	31.0 in	811.0 mm	31.9 in	835.0 mm	32.9 in
E BB OFFSET	-60.0 mm	-2.4 in	-60.0 mm	-2.4 in	-60.0 mm	-2.4 in
F BB HEIGHT	320.0 mm	12.6 in	320.0 mm	12.6 in	320.0 mm	12.6 in
G WHEEL BASE	1,106.0 mm	43.5 in	1,131.0 mm	44.5 in	1,157.0 mm	45.6 in
H BB CENTER TO TOPTUBE CENTER	320.0 mm	12.6 in	372.0 mm	14.6 in	414.0 mm	16.3 in
I BB CENTER TO TOP OF SEATTUBE	390.0 mm	15.4 in	440.0 mm	17.3 in	480.0 mm	18.9 in
J SEAT ANGLE	73.0°		73.0°		73.0°	
K CHAINSTAY	465.0 mm	18.3 in	465.0 mm	18.3 in	465.0 mm	18.3 in
L REACH	385.0 mm	15.2 in	410.0 mm	16.1 in	432.0 mm	17.0 in
M STACK	619.0 mm	24.4 in	619.0 mm	24.4 in	629.0 mm	24.8 in
N STEM LENGTH	60.0 mm	2.4 in	60.0 mm	2.4 in	70.0 mm	2.8 in